


## Rubrik 2.49

### 90°-Bogen

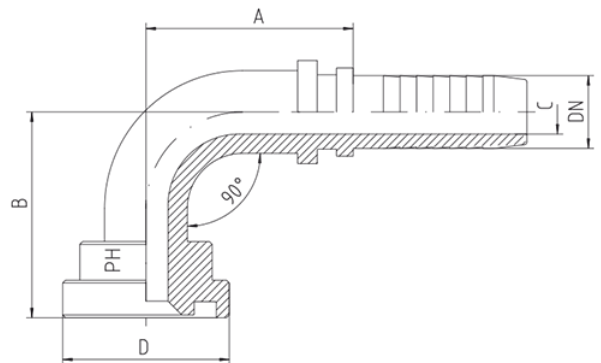

SAE J 518 / ISO 6162 SFL 3 = 3.000 P.S.I. - 90° SFS 6 = 6.000 P.S.I. - 90°

| Schlauch | DN  | Flanschgröße |     | Ca. Maße |   |   | Bestellzeichen |
|----------|-----|--------------|-----|----------|---|---|----------------|
| DN       | in. | D            | in. | A        | B | C |                |

#### Reihe 3.000 P.S.I.

|    |        |       |        |       |       |      |                       |
|----|--------|-------|--------|-------|-------|------|-----------------------|
| 12 | 1/2"   | 30,2  | 1/2"   | 45,0  | 54,0  | 9,5  | SFL3-1/2"-90°-DN 12   |
| 16 | 5/8"   | 30,2  | 1/2"   | 58,0  | 58,0  | 12,0 | SFL3-1/2"-90°-DN 16   |
| 12 | 1/2"   | 38,1  | 3/4"   | 56,0  | 60,0  | 9,5  | SFL3-3/4"-90°-DN 12   |
| 16 | 5/8"   | 38,1  | 3/4"   | 74,0  | 61,0  | 12,0 | SFL3-3/4"-90°-DN 16   |
| 19 | 3/4"   | 38,1  | 3/4"   | 75,0  | 68,0  | 14,5 | SFL3-3/4"-90°-DN 19   |
| 19 | 3/4"   | 44,5  | 1"     | 75,0  | 73,0  | 14,5 | SFL3-1"-90°-DN 19     |
| 25 | 1"     | 44,5  | 1"     | 85,0  | 77,0  | 20,0 | SFL3-1"-90°-DN 25     |
| 25 | 1"     | 50,8  | 1 1/4" | 104,0 | 89,0  | 20,0 | SFL3-1 1/4"-90°-DN 25 |
| 31 | 1 1/4" | 50,8  | 1 1/4" | 102,0 | 92,0  | 25,0 | SFL3-1 1/4"-90°-DN 31 |
| 38 | 1 1/2" | 50,8  | 1 1/4" | 121,0 | 101,0 | 31,0 | SFL3-1 1/4"-90°-DN 38 |
| 31 | 1 1/4" | 60,3  | 1 1/2" | 124,0 | 92,5  | 25,0 | SFL3-1 1/2"-90°-DN 31 |
| 38 | 1 1/2" | 60,3  | 1 1/2" | 118,0 | 106,0 | 31,0 | SFL3-1 1/2"-90°-DN 38 |
| 38 | 1 1/2" | 71,4  | 2"     | 120,0 | 120,0 | 31,0 | SFL3-2"-90°-DN 38     |
| 51 | 2"     | 71,4  | 2"     | 146,0 | 144,0 | 42,0 | SFL3-2"-90°-DN 51     |
| 60 | 2 3/8" | 84,1  | 2 1/2" |       |       |      | SFL3-2 1/2"-90°-DN 60 |
| 63 | 2 1/2" | 84,1  | 2 1/2" | 213,0 | 183,0 | 55,0 | SFL3-2 1/2"-90°-DN 63 |
| 76 | 3"     | 101,5 | 3"     |       |       |      | SFL3-3"-90°-DN 76     |
| 80 |        | 101,5 | 3"     |       |       |      | SFL3-3"-90°-DN 80     |

**Reihe 6.000 P.S.I.**

|    |        |      |        |       |       |      |                       |
|----|--------|------|--------|-------|-------|------|-----------------------|
| 12 | 1/2"   | 31,7 | 1/2"   | 44,0  | 56,0  | 9,5  | SFS6-1/2"-90°-DN 12   |
| 16 | 5/8"   | 31,7 | 1/2"   | 59,0  | 60,0  | 12,0 | SFS6-1/2"-90°-DN 16   |
| 12 | 1/2"   | 41,3 | 3/4"   | 55,5  | 62,0  | 9,5  | SFS6-3/4"-90°-DN 12   |
| 16 | 5/8"   | 41,3 | 3/4"   | 56,0  | 61,0  | 12,0 | SFS6-3/4"-90°-DN 16   |
| 19 | 3/4"   | 41,3 | 3/4"   | 75,0  | 70,0  | 14,5 | SFS6-3/4"-90°-DN 19   |
| 19 | 3/4"   | 47,6 | 1"     | 77,0  | 72,0  | 14,5 | SFS6-1"-90°-DN 19     |
| 25 | 1"     | 47,6 | 1"     | 84,0  | 78,0  | 20,0 | SFS6-1"-90°-DN 25     |
| 25 | 1"     | 54,0 | 1 1/4" | 105,0 | 91,0  | 20,0 | SFS6-1 1/4"-90°-DN 25 |
| 31 | 1 1/4" | 54,0 | 1 1/4" | 103,0 | 92,0  | 25,0 | SFS6-1 1/4"-90°-DN 31 |
| 31 | 1 1/4" | 63,5 | 1 1/2" | 124,0 | 95,0  | 25,0 | SFS6-1 1/2"-90°-DN 31 |
| 38 | 1 1/2" | 63,5 | 1 1/2" | 124,0 | 104,0 | 31,0 | SFS6-1 1/2"-90°-DN 38 |
| 38 | 1 1/2" | 79,4 | 2"     | 120,0 | 122,0 | 31,0 | SFS6-2"-90°-DN 38     |
| 51 | 2"     | 79,4 | 2"     | 147,0 | 139,0 | 41,0 | SFS6-2"-90°-DN 51     |