
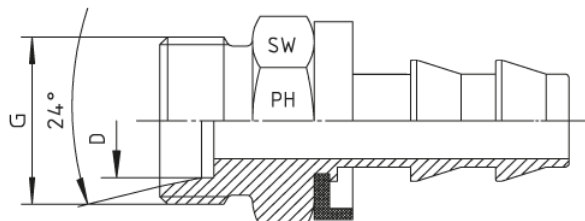


Rubrik 2.72

Aussengewinde-Nippel - Leichte Reihe - Metrisch - 24°-Konus

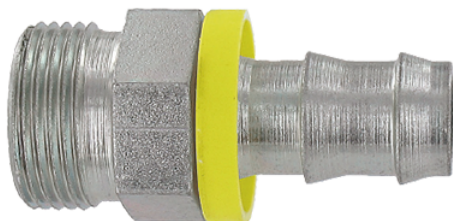

Einsteck-CEL-Nippel für Steckschlauch Mit 24°-Konus für Schneidringverschraubungen DIN 2353 / DIN EN ISO 8434-1 Leichte Reihe = CEL

Schlauch	DN	Gewinde	Rohr A.D.	Ca. Maße			Bestellzeichen
DN	in.	G	D	A	C	SW	
06	1/4"	M 12 x 1,5	6			14	PL-CEL-06-DN 06
06	1/4"	M 14 x 1,5	8			14	PL-CEL-08-DN 06
10	3/8"	M 16 x 1,5	10			17	PL-CEL-10-DN 10
10	3/8"	M 18 x 1,5	12			19	PL-CEL-12-DN 10
12	1/2"	M 22 x 1,5	15	22,5	9,5	22	PL-CEL-15-DN 12
16	5/8"	M 26 x 1,5	18	22,0	13,0	27	PL-CEL-18-DN 16
19	3/4"	M 30 x 2	22			30	PL-CEL-22-DN 19
25	1"	M 36 x 2	28			36	PL-CEL-28-DN 25