
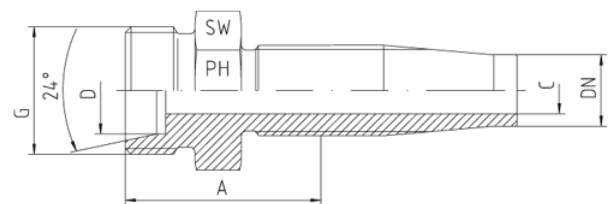


Rubrik 4.9

CEL + CES 24°-Konus

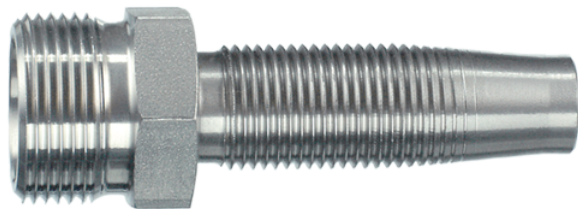

CEL - 24°-Konus-Armatur CES - 24°-Konus-Armatur Hinweise zur Montage: Das Schlauchnippel-Gewinde unbedingt vor der Montage dick einölen oder einfetten. (Schmierstoffe Rubrik 12)

Schlauch	DN	Gewinde	Rohr A.D.	Ca. Maße			Bestellzeichen
DN	in.	G	D	A	C	SW	

Reihe L

06	1/4"	M 12 x 1,5	6	27,9	4,0	12	SR-CEL-06-DN 06
06	1/4"	M 14 x 1,5	8	27,9	4,0	14	SR-CEL-08-DN 06
08	5/16"	M 16 x 1,5	10	29,7	6,0	17	SR-CEL-10-DN 08
10	3/8"	M 18 x 1,5	12	30,0	7,5	19	SR-CEL-12-DN 10
12	1/2"	M 22 x 1,5	15	32,0	10,0	22	SR-CEL-15-DN 12
16	5/8"	M 26 x 1,5	18	35,1	13,0	27	SR-CEL-18-DN 16
19	3/4"	M 30 x 2	22	38,4	15,5	32	SR-CEL-22-DN 19
25	1"	M 36 x 2	28	43,2	21,5	36	SR-CEL-28-DN 25

Reihe S

06	1/4"	M 14 x 1,5	6	27,9	4,0	14	SR-CES-06-DN 06
06	1/4"	M 16 x 1,5	8	28,5	4,0	17	SR-CES-08-DN 06
06	1/4"	M 18 x 1,5	10	28,5	4,0	19	SR-CES-10-DN 06
08	5/16"	M 20 x 1,5	12	31,4	6,0	22	SR-CES-12-DN 08
10	3/8"	M 20 x 1,5	12	31,0	7,5	22	SR-CES-12-DN 10
10	3/8"	M 22 x 1,5	14	33,6	7,5	22	SR-CES-14-DN 10
12	1/2"	M 24 x 1,5	16	35,2	10,0	24	SR-CES-16-DN 12

16	5/8"	M 30 x 2	20	40,4	13,0	30	SR-CES-20-DN 16
19	3/4"	M 36 x 2	25	43,9	15,5	36	SR-CES-25-DN 19
25	1"	M 42 x 2	30	54,9	21,5	46	SR-CES-30-DN 25