
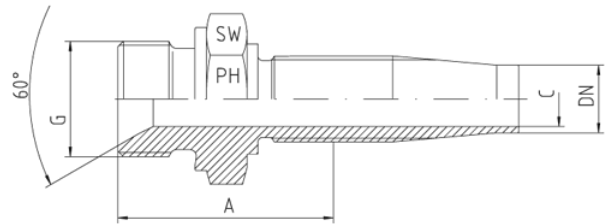


## Rubrik 4.13

### BSP-Außengewinde-Nippel - 60°-Konus

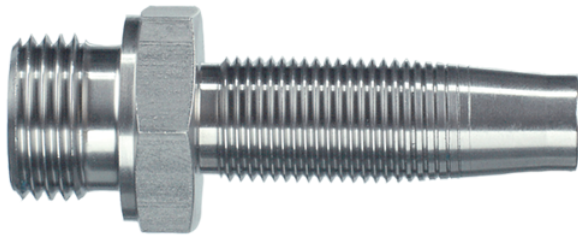

AGR - 60°-Konus Außengewinde-Armatur Hinweise zur Montage: Das Schlauchnippel-Gewinde unbedingt vor der Montage dick einölen oder einfetten. (Schmierstoffe Rubrik 12)

Schlauch	DN	Gewinde	Ca. Maße			Bestellzeichen	
			DN	C	SW		
	<b>DN</b>	<b>in.</b>	<b>G</b>	<b>A</b>	<b>C</b>	<b>SW</b>	
06	1/4"	1/4"-19	29,5	4,0	19	SR-AGR-1/4"-DN 06	
08	5/16"	3/8"-19	33,4	5,5	22	SR-AGR-3/8"-DN 08	
10	3/8"	3/8"-19	33,4	7,5	22	SR-AGR-3/8"-DN 10	
10	3/8"	1/2"-14	38,4	7,5	27	SR-AGR-1/2"-DN 10	
12	1/2"	1/2"-14	38,6	10,0	27	SR-AGR-1/2"-DN 12	
16	5/8"	3/4"-14	44,8	13,0	32	SR-AGR-3/4"-DN 16	
19	3/4"	3/4"-14	44,8	15,5	32	SR-AGR-3/4"-DN 19	
19	3/4"	1"-11	45,8	15,5	41	SR-AGR-1"-DN 19	
25	1"	1"-11	51,5	21,5	41	SR-AGR-1"-DN 25	