
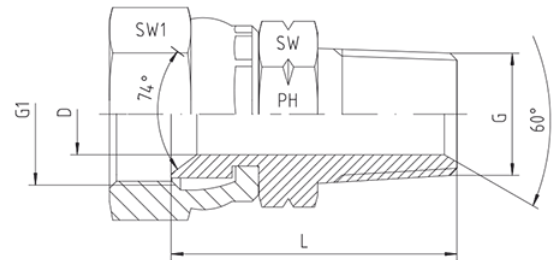


## Rubrik 6.29

### JIC - Weiblich x NPT - Männlich

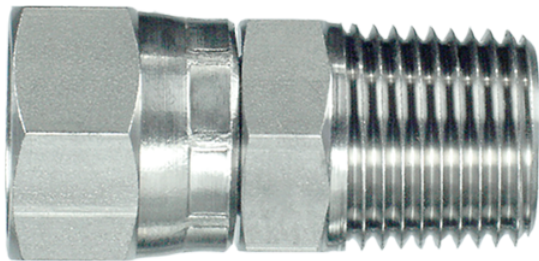

#### JIC - Weiblich - Drehbar NPT - Männlich

Druck	Rohr A.D.		Gewinde		Ca. Maße				Bestellzeichen	
	PN	mm	in.	G1 = UNF/UN	G = NPT	L	D	SW1		SW
350	6	1/4"		7/16"-20	1/8"-27	24,0	4,0	17	12	1252518-04-02
350	6	1/4"		7/16"-20	1/4"-18	30,0	4,0	17	17	1252518-04-04
350	6	1/4"		7/16"-20	3/8"-18	30,0	4,0	17	19	1252518-04-06
350	8	5/16"		1/2"-20	1/8"-27	24,0	4,0	17	12	1252518-05-02
350	8	5/16"		1/2"-20	1/4"-18	30,0	4,0	17	14	1252518-05-04
350	8	5/16"		1/2"-20	3/8"-18	31,0	4,0	17	19	1252518-05-06
350	10	3/8"		9/16"-18	1/8"-27	24,5	4,0	19	14	1252518-06-02
350	10	3/8"		9/16"-18	1/4"-18	30,0	6,0	19	17	1252518-06-04
350	10	3/8"		9/16"-18	3/8"-18	31,5	7,0	19	19	1252518-06-06
350	10	3/8"		9/16"-18	1/2"-14	36,0	7,0	19	22	1252518-06-08
350	12	1/2"		3/4"-16	1/4"-18	32,0	6,0	24	17	1252518-08-04
350	12	1/2"		3/4"-16	3/8"-18	32,5	9,0	24	19	1252518-08-06
350	12	1/2"		3/4"-16	1/2"-14	39,0	9,0	24	22	1252518-08-08
280	12	1/2"		3/4"-16	3/4"-14	40,0	10,0	24	27	1252518-08-12
350	14, 15, 16	5/8"		7/8"-14	3/8"-18	35,0	9,0	27	22	1252518-10-06
350	14, 15, 16	5/8"		7/8"-14	1/2"-14	40,0	12,0	27	22	1252518-10-08
280	14, 15, 16	5/8"		7/8"-14	3/4"-14	41,0	12,5	27	27	1252518-10-12
280	18, 20	3/4"		1 1/16"-12	1/2"-14	41,0	13,5	32	27	1252518-12-08
280	18, 20	3/4"		1 1/16"-12	3/4"-14	41,0	15,0	32	27	1252518-12-12
280	18, 20	3/4"		1 1/16"-12	1"-11,5	46,0	15,0	32	36	1252518-12-16

280	25	1"	1 5/16"-12	1/2"-14					1252518-16-08
280	25	1"	1 5/16"-12	3/4"-14	45,0	18,0	41	32	1252518-16-12
280	25	1"	1 5/16"-12	1"-11,5	48,0	21,0	41	36	1252518-16-16
210	25	1"	1 5/16"-12	1 1/4"-11,5	52,0	21,0	41	46	1252518-16-20
210	28, 30, 32	1 1/4"	1 5/8"-12	1"-11,5	48,5	21,0	50	41	1252518-20-16
210	28, 30, 32	1 1/4"	1 5/8"-12	1 1/4"-11,5	52,0	27,5	50	46	1252518-20-20
210	28, 30, 32	1 1/4"	1 5/8"-12	1 1/2"-11,5			50		1252518-20-24
210	35, 38	1 1/2"	1 7/8"-12	1 1/4"-11,5	54,0	32,0	55	46	1252518-24-20
210	35, 38	1 1/2"	1 7/8"-12	1 1/2"-11,5	54,5	33,0	55	50	1252518-24-24