


Rubrik 6.26

EVW-Verschraubungen - 90° - UN/UNF

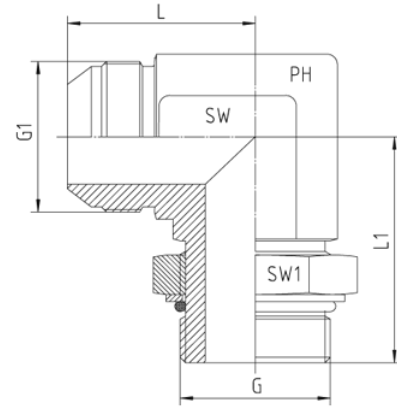

JIC - Männlich

Einschraubgewinde: UNF

Abdichtung durch Runddichtung (O-Ring) (FKM)

Achtung: Spezielle Gewindeaussenkung erforderlich.

| Druck | Rohr A.D. | | Gewinde | | Ca. Maße | | | | O-Ring | Bestellzeichen | |
|-------|------------|--------|---------|-------------|------------|----|----|-----|--------|----------------|---------------|
| | PN | mm | in. | G1 = UNF/UN | G = UNF/UN | L | L1 | SW1 | | | SW |
| 350 | 6 | 1/4" | | 7/16"-20 | 7/16"-20 | 23 | 26 | 14 | 11 | 9,17 x 1,83 | 1252533-04-04 |
| 350 | 8 | 5/16" | | 1/2"-20 | 1/2"-20 | 24 | 29 | 16 | 13 | 10,52 x 1,83 | 1252533-05-05 |
| 350 | 10 | 3/8" | | 9/16"-18 | 9/16"-18 | 27 | 32 | 17 | 14 | 11,89 x 1,98 | 1252533-06-06 |
| 350 | 12 | 1/2" | | 3/4"-16 | 3/4"-16 | 32 | 37 | 22 | 19 | 16,36 x 2,21 | 1252533-08-08 |
| 350 | 14, 15, 16 | 5/8" | | 7/8"-14 | 7/8"-14 | 37 | 43 | 27 | 22 | 19,18 x 2,46 | 1252533-10-10 |
| 350 | 18, 20 | 3/4" | | 1 1/16"-12 | 1 1/16"-12 | 42 | 49 | 32 | 27 | 23,74 x 2,95 | 1252533-12-12 |
| 280 | 25 | 1" | | 1 5/16"-12 | 1 5/16"-12 | 46 | 52 | 38 | 33 | 29,74 x 2,95 | 1252533-16-16 |
| 210 | 28, 30, 32 | 1 1/4" | | 1 5/8"-12 | 1 5/8"-12 | 52 | 57 | 50 | 41 | 37,47 x 3,00 | 1252533-20-20 |
| 140 | 35, 38 | 1 1/2" | | 1 7/8"-12 | 1 7/8"-12 | 59 | 61 | 55 | 50 | 43,69 x 3,00 | 1252533-24-24 |