


## Rubrik 6.26

### EVW-Verschraubungen - 90° - UN/UNF

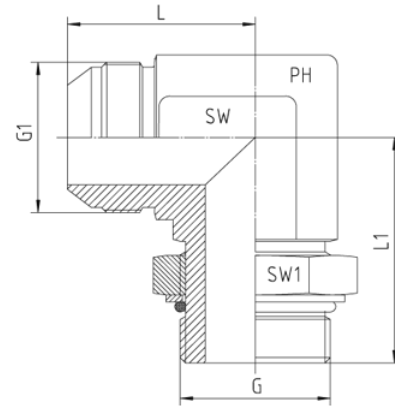

JIC - Männlich

Einschraubgewinde: UNF

Abdichtung durch Runddichtung (O-Ring) (FKM)

Achtung: Spezielle Gewindeausenkung erforderlich.

Druck	Rohr A.D.		Gewinde		Ca. Maße				O-Ring	Bestellzeichen	
	PN	mm	in.	G1 = UNF/UN	G = UNF/UN	L	L1	SW1			SW
350	6	1/4"		7/16"-20	7/16"-20	23	26	14	11	9,17 x 1,83	1252533-04-04
350	8	5/16"		1/2"-20	1/2"-20	24	29	16	13	10,52 x 1,83	1252533-05-05
350	10	3/8"		9/16"-18	9/16"-18	27	32	17	14	11,89 x 1,98	1252533-06-06
350	12	1/2"		3/4"-16	3/4"-16	32	37	22	19	16,36 x 2,21	1252533-08-08
350	14, 15, 16	5/8"		7/8"-14	7/8"-14	37	43	27	22	19,18 x 2,46	1252533-10-10
350	18, 20	3/4"		1 1/16"-12	1 1/16"-12	42	49	32	27	23,74 x 2,95	1252533-12-12
280	25	1"		1 5/16"-12	1 5/16"-12	46	52	38	33	29,74 x 2,95	1252533-16-16
210	28, 30, 32	1 1/4"		1 5/8"-12	1 5/8"-12	52	57	50	41	37,47 x 3,00	1252533-20-20
140	35, 38	1 1/2"		1 7/8"-12	1 7/8"-12	59	61	55	50	43,69 x 3,00	1252533-24-24