
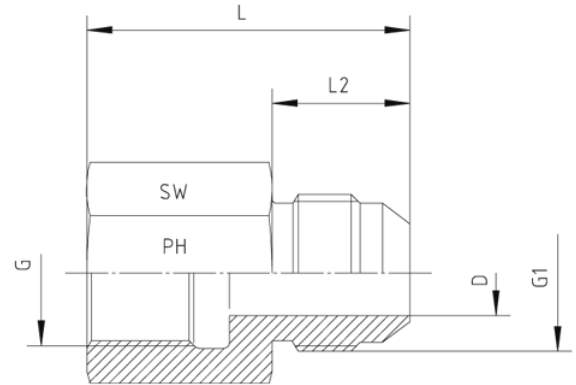


## Rubrik 6.32

### 37°-Bördel-Aufschraub-Verschraubungen

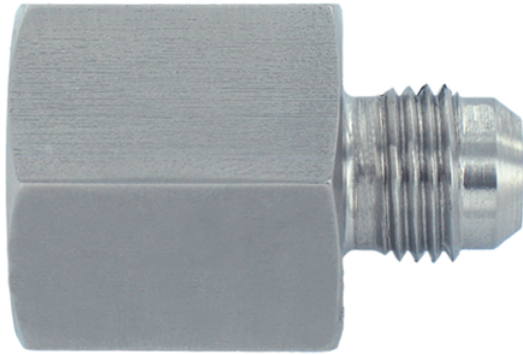

Mit JIC-Gewinde Innengewinde: Whitworth-Rohrgewinde - Zylindrisch

Druck	Rohr A.D.		Gewinde		Ca. Maße				Bestellzeichen
	PN	mm	in.	G1 = UNF/UN	G = BSP	L	L2	D	
350	6	1/4"	7/16"-20	1/8"-28	30,0	14,0	4,5	14	1252532-04-02
350	6	1/4"	7/16"-20	1/4"-19	35,0	14,0	4,5	19	1252532-04-04
350	8	5/16"	1/2"-20	1/8"-28	30,0	14,0	5,0	14	1252532-05-02
350	8	5/16"	1/2"-20	1/4"-19	35,0	14,0	6,0	19	1252532-05-04
350	10	3/8"	9/16"-18	1/4"-19	35,5	14,0	7,5	19	1252532-06-04
350	10	3/8"	9/16"-18	3/8"-19	37,0	14,0	7,5	22	1252532-06-06
350	10	3/8"	9/16"-18	1/2"-14	40,0	14,0	7,5	27	1252532-06-08
350	12	1/2"	3/4"-16	3/8"-19	39,5	17,0	10,0	22	1252532-08-06
350	12	1/2"	3/4"-16	1/2"-14	45,5	17,0	10,0	27	1252532-08-08
350	14, 15, 16	5/8"	7/8"-14	1/2"-14	48,0	19,5	12,5	27	1252532-10-08
315	18, 20	3/4"	1 1/16"-12	3/4"-14	52,0	22,0	15,5	36	1252532-12-12
280	25	1"	1 5/16"-12	1"-11	59,5	23,0	21,5	41	1252532-16-16
210	28, 30, 32	1 1/4"	1 5/8"-12	1 1/4"-11	63,0	24,3	27,5	50	1252532-20-20
140	35, 38	1 1/2"	1 7/8"-12	1 1/2"-11	66,5	27,5	33,0	55	1252532-24-24