
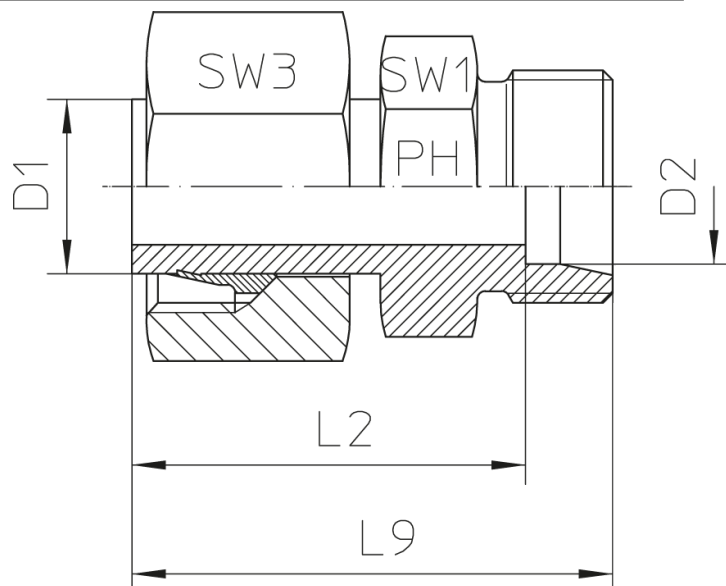


Rubrik 8.267

Konus-Reduzieranschlüsse - OMD

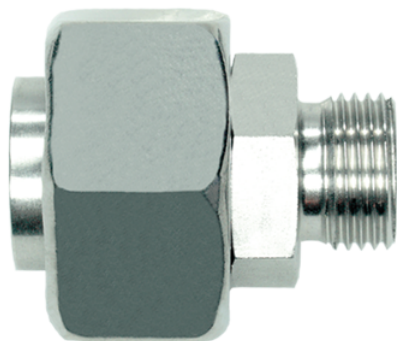

Anschluss D1 ist vormontiert. Die Fertigmontage erfolgt im Stutzen mit ca. 1/2 Umdrehung der Überwurfmutter über den Punkt des deutlich spürbaren Kraftanstieges.

Druck	Rohr A.D.		Ca. Maße				Bestellzeichen
PN	D1	D2	L2	L9	SW1	SW3	

Reihe S

630	8	6	32,0	39,0	14	19	KOR-S-08/06-OMD
630	10	6	33,0	40,0	14	22	KOR-S-10/06-OMD
630	10	8	33,0	40,0	17	22	KOR-S-10/08-OMD
630	12	6	35,0	42,0	14	24	KOR-S-12/06-OMD
630	12	8	35,0	42,0	17	24	KOR-S-12/08-OMD
630	12	10	34,5	42,0	19	24	KOR-S-12/10-OMD
630	14	6	35,0	42,0	17	27	KOR-S-14/06-OMD
630	14	8	35,0	42,0	17	27	KOR-S-14/08-OMD
630	14	10	34,5	42,0	19	27	KOR-S-14/10-OMD
630	14	12	34,5	42,0	22	27	KOR-S-14/12-OMD
400	16	6	39,0	42,0	17	30	KOR-S-16/06-OMD
400	16	8	39,0	46,0	17	30	KOR-S-16/08-OMD
400	16	10	38,5	46,0	19	30	KOR-S-16/10-OMD
400	16	12	38,5	46,0	22	30	KOR-S-16/12-OMD
400	16	14	40,0	48,0	22	30	KOR-S-16/14-OMD
400	20	6	43,5	50,5	22	36	KOR-S-20/06-OMD
400	20	8	43,5	50,5	22	36	KOR-S-20/08-OMD
400	20	10	43,0	50,5	22	36	KOR-S-20/10-OMD

400	20	12	43,0	50,5	22	36	KOR-S-20/12-OMD
400	20	14	42,5	50,5	24	36	KOR-S-20/14-OMD
400	20	16	44,5	53,0	27	36	KOR-S-20/16-OMD
400	25	6	44,0	51,0	27	46	KOR-S-25/06-OMD
400	25	8	44,0	51,0	27	46	KOR-S-25/08-OMD
400	25	10	44,5	52,0	27	46	KOR-S-25/10-OMD
400	25	12	46,5	54,0	27	46	KOR-S-25/12-OMD
400	25	14	46,0		27	46	KOR-S-25/14-OMD
400	25	16	48,5	57,0	27	46	KOR-S-25/16-OMD
400	25	20	48,5	59,0	32	46	KOR-S-25/20-OMD
400	30	6	54,0		32	50	KOR-S-30/06-OMD
400	30	8	54,0		32	50	KOR-S-30/08-OMD
400	30	10	53,5		32	50	KOR-S-30/10-OMD
400	30	12	53,5	61,0	32	50	KOR-S-30/12-OMD
400	30	14	55,0	63,0	32	50	KOR-S-30/14-OMD
400	30	16	54,5	63,0	32	50	KOR-S-30/16-OMD
400	30	20	54,5	65,0	32	50	KOR-S-30/20-OMD
400	30	25	57,5	69,5	41	50	KOR-S-30/25-OMD
250	38	6	55,0		41	60	KOR-S-38/06-OMD
250	38	8	55,0		41	60	KOR-S-38/08-OMD
250	38	10	54,5	62,0	41	60	KOR-S-38/10-OMD
250	38	12	54,5	62,0	41	60	KOR-S-38/12-OMD
250	38	14	56,0		41	60	KOR-S-38/14-OMD
250	38	16	55,5	64,0	41	60	KOR-S-38/16-OMD
250	38	20	57,5	68,0	41	60	KOR-S-38/20-OMD
250	38	25	60,0	72,0	41	60	KOR-S-38/25-OMD
250	38	30	60,5	74,0	46	60	KOR-S-38/30-OMD