


Rubrik 13.26

T-Bohrung

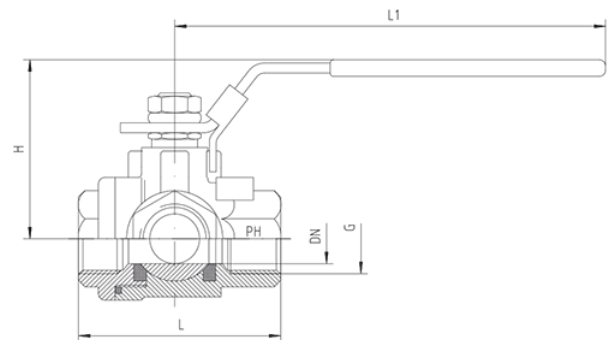

Rohrinnengewinde: DIN / ISO 228

3-Wege - 1.4408

T-Bohrung

Dichtungen: Kugel + Schaltwelle = PTFE (-20°C bis + 180°C)

Bei höheren Temperaturen beachten Sie bitte das Druck- / Temperaturdiagramm.

	Größe	Druck	Ca. Maße mm				Bestellzeichen
DN		PB	G	H	L	L1	
11,5	1/4"	63	1/4"	50	68	97	KH-G 1/4"-3 W-T
12,5	3/8"	63	3/8"	50	68	97	KH-G 3/8"-3 W-T
12,5	1/2"	63	1/2"	50	68	97	KH-G 1/2"-3 W-T
15,0	3/4"	63	3/4"	64	83	127	KH-G 3/4"-3 W-T
20,0	1"	63	1"	66	90	127	KH-G 1"-3 W-T
25,0	1 1/4"	63	1 1/4"	80	97	145	KH-G 1 1/4"-3 W-T
32,0	1 1/2"	63	1 1/2"	83	114	145	KH-G 1 1/2"-3 W-T
40,0	2"	63	2"	96	142	205	KH-G 2"-3 W-T