
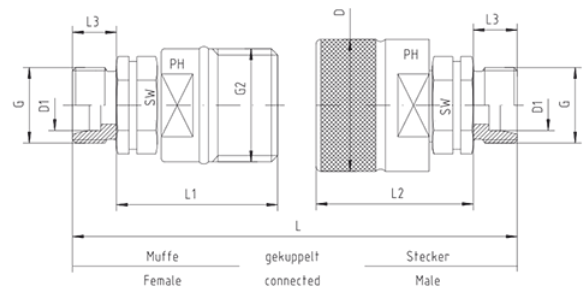


Rubrik 15.16

Typ: SK - Für lötlöse Rohrverschraubungen

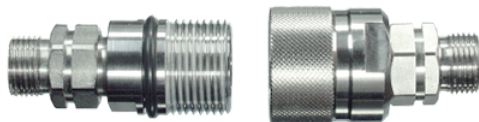

Anschluss für lötlöse Rohrverschraubungen DIN 2353 / DIN EN ISO 8434-1

Baugröße	ISO-Größe	Gewinde		Ca. Maße							Bestellzeichen
	DN	G	G2	D	D1	L	L1	L2	L3	SW	

Reihe L - Muffe / Female

1	6,3	M 12 x 1,5	24 x 2		6				10	19	SKM-1-06-L
2	10,0	M 14 x 1,5	28 x 2		8	102	56,0		10	22	SKM-2-08-L
2	10,0	M 16 x 1,5	28 x 2		10	104	56,0		11	22	SKM-2-10-L
3	12,5	M 18 x 1,5	36 x 2		12	99	54,5		11	30	SKM-3-12-L
3	12,5	M 22 x 1,5	36 x 2		15	101	54,5		12	30	SKM-3-15-L
4	20,0	M 26 x 1,5	42 x 2		18				12	36	SKM-4-18-L
6	25,0	M 30 x 2	48 x 3		22	137	79,5		14	41	SKM-6-22-L
6	25,0	M 36 x 2	48 x 3		28				14	41	SKM-6-28-L
8	40,0	M 45 x 2	70 x 3		35				16	55	SKM-8-35-L
8	40,0	M 52 x 2	70 x 3		42				16	55	SKM-8-42-L

Reihe L - Stecker / Male

1	6,3	M 12 x 1,5	24 x 2	30	6				10	19	SKS-1-06-L
2	10,0	M 14 x 1,5	28 x 2	35	8	102		53,0	10	22	SKS-2-08-L
2	10,0	M 16 x 1,5	28 x 2	35	10	104		53,0	11	22	SKS-2-10-L
3	12,5	M 18 x 1,5	36 x 2	42	12	99		51,0	11	30	SKS-3-12-L
3	12,5	M 22 x 1,5	36 x 2	42	15	101		51,0	12	30	SKS-3-15-L
4	20,0	M 26 x 1,5	42 x 2	48	18				12	36	SKS-4-18-L

6	25,0	M 30 x 2	48 x 3	55	22	137		65,0	14	41	SKS-6-22-L
6	25,0	M 36 x 2	48 x 3	55	28				14	41	SKS-6-28-L
8	40,0	M 45 x 2	70 x 3	80	35				16	55	SKS-8-35-L
8	40,0	M 52 x 2	70 x 3	80	42				16	55	SKS-8-42-L