


Rubrik 9.20

EV-Verschraubungen - 45° - L- und S-Reihe - Standard

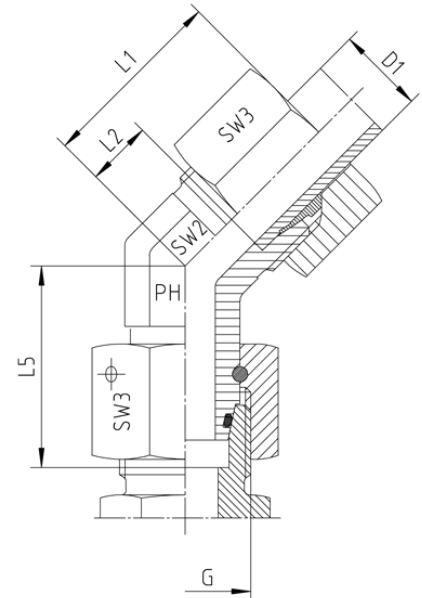

Einstellbare Winkelverschraubungen mit Dichtkegel und O-Ring FKM Rohrseitig Schneidringanschluss

Druck	Rohr A.D.	Gewinde	Ca. Maße					Bestellzeichen
PN	D1	G	L1	L2	L5	SW2	SW3	

Reihe L

500	6	M 12 x 1,5	24	9,0	26,0	14	14	EV-DKOL-06
500	8	M 14 x 1,5	27	12,0	27,5	14	17	EV-DKOL-08
500	10	M 16 x 1,5	27	12,0	29,0	19	19	EV-DKOL-10
400	12	M 18 x 1,5	29	14,0	29,5	19	22	EV-DKOL-12
400	15	M 22 x 1,5	32	17,0	32,5	22	27	EV-DKOL-15
400	18	M 26 x 1,5	33	16,5	35,5	27	32	EV-DKOL-18
250	22	M 30 x 2	35	18,5	38,5	30	36	EV-DKOL-22
250	28	M 36 x 2	40	23,0	41,5	36	41	EV-DKOL-28
250	35	M 45 x 2	48	26,5	51,0	50	50	EV-DKOL-35
250	42	M 52 x 2	49	26,0	56,0	50	60	EV-DKOL-42

Reihe S

800	6	M 14 x 1,5	24	9,0	27,0	14	17	EV-DKOS-06
800	8	M 16 x 1,5	27	12,0	27,5	19	19	EV-DKOS-08
800	10	M 18 x 1,5	30	13,5	30,0	19	22	EV-DKOS-10
630	12	M 20 x 1,5	33	16,5	31,0	22	24	EV-DKOS-12
630	16	M 24 x 1,5	34	15,5	36,5	27	30	EV-DKOS-16
420	20	M 30 x 2	38	16,0	44,5	30	36	EV-DKOS-20

420	25	M 36 x 2	43	18,5	50,0	36	46	EV-DKOS-25
420	30	M 42 x 2	50	23,5	55,0	50	50	EV-DKOS-30
420	38	M 52 x 2	52	21,0	63,0	50	60	EV-DKOS-38