
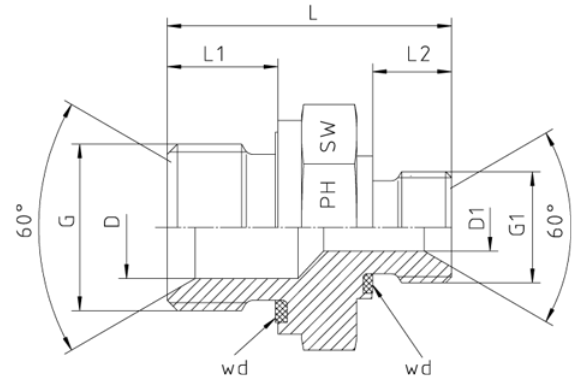


## Rubrik 5.11

### BSP - Zylindrisch - Reduziert - 60°-Konus mit Weichdichtung



BSP - BSP

Mit 60°-Innenkonus

wd = Abdichtung durch Profildichtung - FPM

Männlich - Männlich

Druck	Gewinde		Ca. Maße						Bestellzeichen	
	PN	G = BSP	G1 = BSP	L	L1	L2	D	D1		SW
400		1/4"-19	1/8"-28	28,0	12,0	8	6,0	4,5	19	1050508-04-02
400		3/8"-19	1/8"-28	30,5	12,0	8	9,0	4,5	22	1050508-06-02
400		3/8"-19	1/4"-19	33,0	12,0	10	9,0	6,0	22	1050508-06-04
400		1/2"-14	1/4"-19	38,0	14,0	11	12,5	7,0	27	1050508-08-04
400		1/2"-14	3/8"-19	40,0	14,0	12	13,0	9,0	27	1050508-08-06
400		3/4"-14	1/4"-19	39,5	16,0	10	18,0	6,0	32	1050508-12-04
400		3/4"-14	3/8"-19	41,0	16,0	12	18,0	9,0	32	1050508-12-06
400		3/4"-14	1/2"-14	45,0	16,0	14	18,0	13,0	32	1050508-12-08
400		1"-11	3/8"-19	47,0	18,0	12	23,0	9,0	41	1050508-16-06
400		1"-11	1/2"-14	48,0	18,0	14	23,5	13,0	41	1050508-16-08
400		1"-11	3/4"-14	53,0	18,0	16	23,5	17,0	41	1050508-16-12
200		1 1/4"-11	1/2"-14	51,0	20,0	14	30,0	13,0	50	1050508-20-08
200		1 1/4"-11	3/4"-14	53,5	20,0	16	30,5	18,0	50	1050508-20-12
200		1 1/4"-11	1"-11	58,0	20,0	18	30,5	23,0	50	1050508-20-16
200		1 1/2"-11	3/4"-14	55,0	22,0	16	37,0	17,0	55	1050508-24-12
200		1 1/2"-11	1"-11	57,0	22,0	18	37,0	23,5	55	1050508-24-16
200		1 1/2"-11	1 1/4"-11	61,0	22,0	20	37,0	30,0	55	1050508-24-20
100		2"-11	1"-11	62,0	25,0	18	43,0	23,5	70	1050508-32-16

100	2"-11	1 1/4"-11	62,0	25,0	20	45,0	30,0	70	1050508-32-20
100	2"-11	1 1/2"-11	64,0	25,0	22	45,0	37,0	70	1050508-32-24