


## Rubrik 15.12

### Rohrinnengewinde - ISO 228

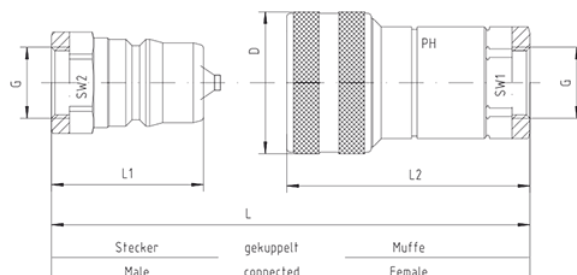

ISO 7241-1 - Form A Komplett hergestellt aus Edelstahl mit FKM-Dichtungen und PTFE-Stützringen Rohrinnengewinde DIN / ISO 228

| Druck | ISO-Größe | Gewinde | Ca. Maße |   |    |    |     |     | Durchflußmenge | Bestellzeichen |
|-------|-----------|---------|----------|---|----|----|-----|-----|----------------|----------------|
| PN    | DN        | G = BSP | D        | L | L1 | L2 | SW1 | SW2 | l/min.         |                |

#### Reihe Muffe / Female

|     |      |      |    |       |  |      |    |  |     |                    |
|-----|------|------|----|-------|--|------|----|--|-----|--------------------|
| 300 | 6,3  | 1/4" | 26 | 71,5  |  | 50,5 | 19 |  | 10  | SV-Mu-G 1/4"-ISO-A |
| 250 | 10,0 | 3/8" | 30 | 79,5  |  | 57,0 | 22 |  | 23  | SV-Mu-G 3/8"-ISO-A |
| 250 | 12,5 | 1/2" | 38 | 93,0  |  | 70,0 | 27 |  | 45  | SV-Mu-G 1/2"-ISO-A |
| 250 | 20,0 | 3/4" | 48 | 107,0 |  | 81,0 | 34 |  | 106 | SV-Mu-G 3/4"-ISO-A |
| 200 | 25,0 | 1"   | 54 | 125,5 |  | 96,0 | 38 |  | 189 | SV-Mu-G 1"-ISO-A   |

#### Reihe Stecker / Male

|     |      |      |  |       |      |  |  |    |     |                    |
|-----|------|------|--|-------|------|--|--|----|-----|--------------------|
| 300 | 6,3  | 1/4" |  | 71,5  | 35,5 |  |  | 19 | 10  | SV-St-G 1/4"-ISO-A |
| 250 | 10,0 | 3/8" |  | 79,5  | 40,0 |  |  | 22 | 23  | SV-St-G 3/8"-ISO-A |
| 250 | 12,5 | 1/2" |  | 93,0  | 45,5 |  |  | 27 | 45  | SV-St-G 1/2"-ISO-A |
| 250 | 20,0 | 3/4" |  | 107,0 | 53,5 |  |  | 32 | 106 | SV-St-G 3/4"-ISO-A |
| 200 | 25,0 | 1"   |  | 125,5 | 63,0 |  |  | 41 | 189 | SV-St-G 1"-ISO-A   |