
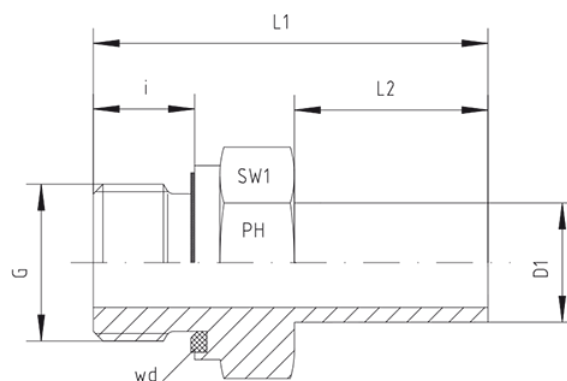


Rubrik 8.151

Whitworth - Zylindrisch - ov

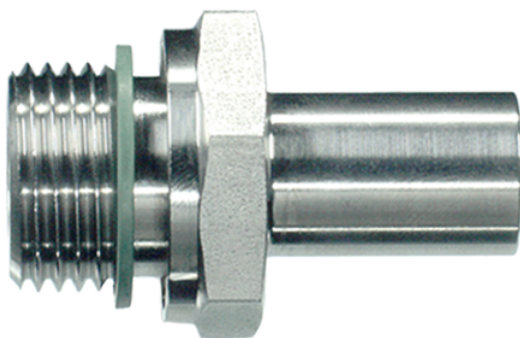

Ohne Vormontage - ov

Einschraubgewinde:

Whitworth-Rohrgewinde - Zylindrisch

wd = Abdichtung durch Profildichtung - FPM

Druck	Rohr A.D.	Außengewinde	Ca. Maße				Bestellzeichen
PN	D1	G	L1	L2	i	SW1	

Reihe S

630	6	G 1/8"	32,5	19,0	8	14	EVGE-S-06-G 1/8"-ov-wd
630	6	G 1/4"	39,5	20,5	12	19	EVGE-S-06-G 1/4"-ov-wd
630	8	G 1/4"	41,0	20,5	12	19	EVGE-S-08-G 1/4"-ov-wd
630	8	G 3/8"	42,5	20,5	12	22	EVGE-S-08-G 3/8"-ov-wd
630	10	G 1/4"	39,5	20,5	12	19	EVGE-S-10-G 1/4"-ov-wd
630	10	G 3/8"	44,0	21,0	12	22	EVGE-S-10-G 3/8"-ov-wd
630	10	G 1/2"	46,5	20,5	14	27	EVGE-S-10-G 1/2"-ov-wd
630	12	G 1/4"	42,0	21,5	12	19	EVGE-S-12-G 1/4"-ov-wd
630	12	G 3/8"	45,0	22,0	12	22	EVGE-S-12-G 3/8"-ov-wd
630	12	G 1/2"	48,5	22,5	14	27	EVGE-S-12-G 1/2"-ov-wd
630	14	G 1/2"	51,0	24,5	14	27	EVGE-S-14-G 1/2"-ov-wd
400	16	G 3/8"	48,5	26,0	12	22	EVGE-S-16-G 3/8"-ov-wd
400	16	G 1/2"	51,0	26,0	14	27	EVGE-S-16-G 1/2"-ov-wd
400	16	G 3/4"	54,5	26,0	16	32	EVGE-S-16-G 3/4"-ov-wd
400	20	G 1/2"	56,5	29,5	14	27	EVGE-S-20-G 1/2"-ov-wd
400	20	G 3/4"	59,0	29,0	16	32	EVGE-S-20-G 3/4"-ov-wd

400	25	G 3/4"	63,0	33,0	16	32	EVGE-S-25-G 3/4"-ov-wd
400	25	G 1"	66,0	33,0	18	41	EVGE-S-25-G 1"-ov-wd
400	30	G 1 1/4"	71,0	34,0	20	50	EVGE-S-30-G 1 1/4"-ov-wd
315	38	G 1 1/2"	83,5	40,0	22	55	EVGE-S-38-G 1 1/2"-ov-wd