


## Rubrik 8.274

### VST - Verschlusschrauben mit Innensechskant

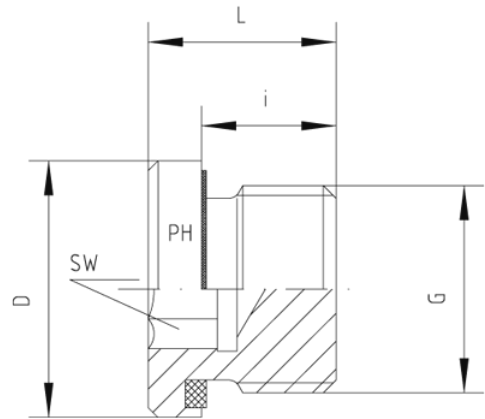

Mit Innensechskant und Weichdichtung - FPM - wd

Druck	Metrisches Feingewinde - Zylindrisch	Ca. Maße				Bestellzeichen
		D	L	i	SW	
PN	G					
<b>Reihe M</b>						
400	M 8 x 1	12	12,0	8	4	VST-M 8x1-wd
400	M 10 x 1	14	12,0	8	5	VST-M 10x1-wd
400	M 12 x 1,5	17	17,0	12	6	VST-M 12x1,5-wd
400	M 14 x 1,5	19	17,0	12	6	VST-M 14x1,5-wd
400	M 16 x 1,5	22	17,0	12	8	VST-M 16x1,5-wd
400	M 18 x 1,5	24	17,0	12	8	VST-M 18x1,5-wd
400	M 20 x 1,5	26	19,0	14	10	VST-M 20x1,5-wd
400	M 22 x 1,5	27	19,0	14	10	VST-M 22x1,5-wd
400	M 26 x 1,5	32	21,0	16	12	VST-M 26x1,5-wd
400	M 27 x 2	32	21,0	16	12	VST-M 27x2-wd
400	M 33 x 2	40	22,5	16	17	VST-M 33x2-wd
315	M 42 x 2	50	22,5	16	22	VST-M 42x2-wd
315	M 48 x 2	55	22,5	16	24	VST-M 48x2-wd
<b>Reihe R</b>						
400	1/8"	14	12,0	8	5	VST-R 1/8"-wd
400	1/4"	19	17,0	12	6	VST-R 1/4"-wd

400	3/8"	22	17,0	12	8	VST-R 3/8"-wd
400	1/2"	27	19,0	14	10	VST-R 1/2"-wd
400	3/4"	32	21,0	16	12	VST-R 3/4"-wd
400	1"	40	22,5	16	17	VST-R 1"-wd
315	1 1/4"	50	22,5	16	22	VST-R 1 1/4"-wd
315	1 1/2"	55	22,5	16	24	VST-R 1 1/2"-wd
250	2"	70	34,0	24	32	VST-R 2"-wd