
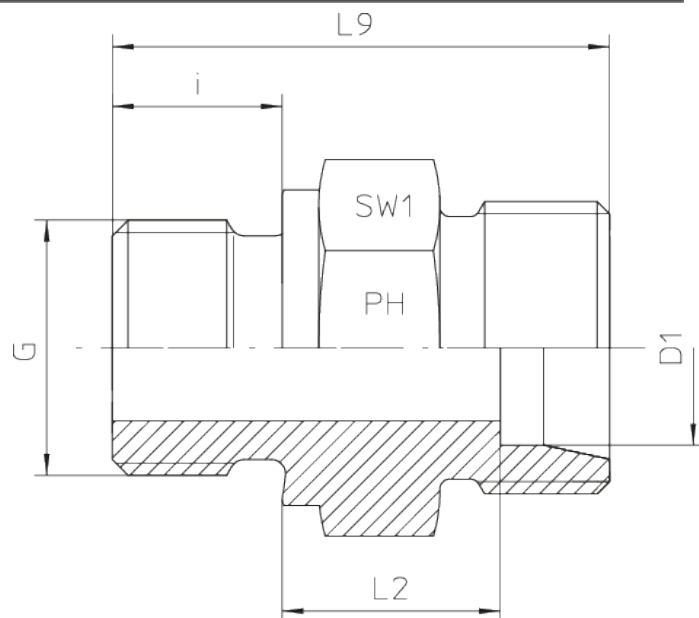


Rubrik 8.72

Metrisch - Zylindrisch - B - OMD

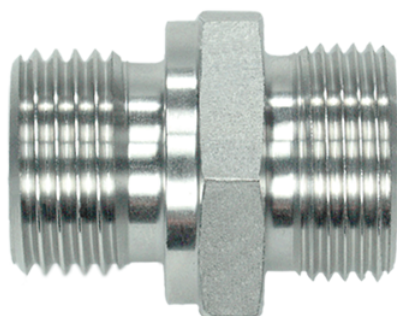

Gerade Einschraubverschraubungsstutzen S-Reihe Einschraubgewinde: Metrisches Feingewinde - Zylindrisch Abdichtung durch Dichtkante Form B

Druck	Rohr A.D.	Gewinde	Ca. Maße				Bestellzeichen
PN	D1	G	L2	L9	i	SW1	

Reihe S

630	6	M 12 x 1,5	13,0	32,0	12	17	GE-S-06-M 12x1,5-OMD
630	6	M 14 x 1,5	13,0	32,0	12	19	GE-S-06-M 14x1,5-OMD
630	8	M 12 x 1,5	15,0	34,0	12	17	GE-S-08-M 12x1,5-OMD
630	8	M 14 x 1,5	15,0	34,0	12	19	GE-S-08-M 14x1,5-OMD
630	8	M 16 x 1,5	15,5	34,5	12	22	GE-S-08-M 16x1,5-OMD
630	10	M 14 x 1,5	14,5	33,5	12	19	GE-S-10-M 14x1,5-OMD
630	10	M 16 x 1,5	15,0	34,5	12	22	GE-S-10-M 16x1,5-OMD
630	10	M 18 x 1,5	15,0	34,5	12	24	GE-S-10-M 18x1,5-OMD
630	12	M 12 x 1,5	16,5	36,0	12	22	GE-S-12-M 12x1,5-OMD
630	12	M 14 x 1,5	16,0	35,5	12	22	GE-S-12-M 14x1,5-OMD
630	12	M 16 x 1,5	17,0	36,5	12	22	GE-S-12-M 16x1,5-OMD
630	12	M 18 x 1,5	17,0	36,5	12	24	GE-S-12-M 18x1,5-OMD
630	12	M 20 x 1,5	17,5	38,5	14	27	GE-S-12-M 20x1,5-OMD
400	12	M 22 x 1,5	17,5	39,0	14	27	GE-S-12-M 22x1,5-OMD
630	14	M 20 x 1,5	19,0	41,0	14	27	GE-S-14-M 20x1,5-OMD
400	14	M 22 x 1,5	18,5	40,5	14	27	GE-S-14-M 22x1,5-OMD
400	16	M 18 x 1,5	18,0	38,5	12	27	GE-S-16-M 18x1,5-OMD
400	16	M 22 x 1,5	18,5	41,0	14	27	GE-S-16-M 22x1,5-OMD

400	20	M 27 x 2	20,5	47,0	16	32	GE-S-20-M 27x2-OMD
400	25	M 33 x 2	23,0	53,0	18	41	GE-S-25-M 33x2-OMD
250	30	M 42 x 2	23,5	57,0	20	50	GE-S-30-M 42x2-OMD
250	38	M 48 x 2	26,0	64,0	22	55	GE-S-38-M 48x2-OMD