


Rubrik 9.22

EV-Verschraubungen - 45° - L- und S-Reihe - OMD

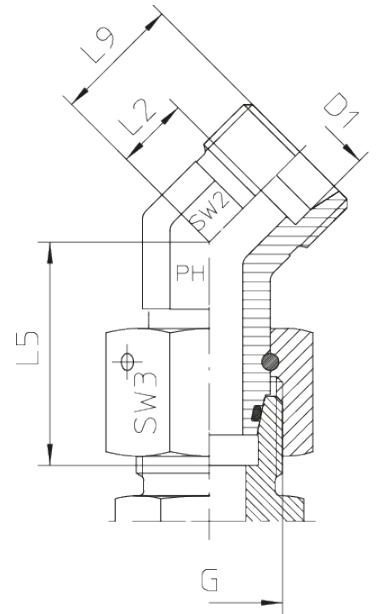

Einstellbare Winkelverschraubungen mit Dichtkegel und O-Ring FKM Rohrseitig Schneidringanschluss

Druck	Rohr A.D.	Gewinde	Ca. Maße					Bestellzeichen
PN	D1	G	L2	L5	L9	SW2	SW3	

Reihe L

500	6	M 12 x 1,5	9,0	26,0	16,0	14	14	EV-DKOL-06-OMD
500	8	M 14 x 1,5	12,0	27,5	19,0	14	17	EV-DKOL-08-OMD
500	10	M 16 x 1,5	12,0	29,0	19,0	19	19	EV-DKOL-10-OMD
400	12	M 18 x 1,5	14,0	29,5	21,0	19	22	EV-DKOL-12-OMD
400	15	M 22 x 1,5	17,0	32,5	24,0	22	27	EV-DKOL-15-OMD
400	18	M 26 x 1,5	16,5	35,5	24,0	27	32	EV-DKOL-18-OMD
250	22	M 30 x 2	18,5	38,5	26,0	30	36	EV-DKOL-22-OMD
250	28	M 36 x 2	23,0	41,5	30,5	36	41	EV-DKOL-28-OMD
250	35	M 45 x 2	26,5	51,0	37,0	50	50	EV-DKOL-35-OMD
250	42	M 52 x 2	26,0	56,0	37,0	50	60	EV-DKOL-42-OMD

Reihe S

800	6	M 14 x 1,5	9,0	27,0	16,0	14	17	EV-DKOS-06-OMD
800	8	M 16 x 1,5	12,0	27,5	19,0	19	19	EV-DKOS-08-OMD
800	10	M 18 x 1,5	13,5	30,0	21,0	19	22	EV-DKOS-10-OMD
630	12	M 20 x 1,5	16,5	31,0	24,0	22	24	EV-DKOS-12-OMD
630	16	M 24 x 1,5	15,5	36,5	24,0	27	30	EV-DKOS-16-OMD
420	20	M 30 x 2	16,0	44,5	26,5	30	36	EV-DKOS-20-OMD

420	25	M 36 x 2	18,5	50,0	30,5	36	46	EV-DKOS-25-OMD
420	30	M 42 x 2	23,5	55,0	37,0	50	50	EV-DKOS-30-OMD
420	38	M 52 x 2	21,0	63,0	37,0	50	60	EV-DKOS-38-OMD