


## Rubrik 2.42

### BSP - 45°-Bogen

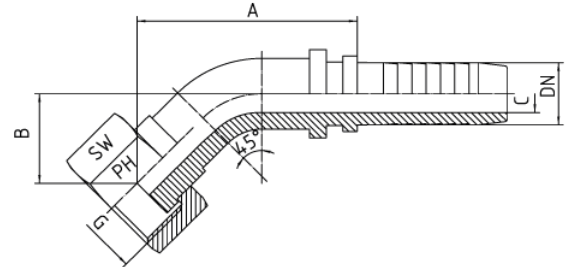

Mit BSP Überwurfmutter DRF - 45°-Bogen

| Schlauch | DN |        | Gewinde   | Ca. Maße |      |      |    | Bestellzeichen       |
|----------|----|--------|-----------|----------|------|------|----|----------------------|
|          | DN | in.    |           | A        | B    | C    | SW |                      |
| 06       |    | 1/4"   | 1/8"-28   | 34,0     | 14,0 | 4,0  | 14 | DRF-1/8"-45°-DN 06   |
| 06       |    | 1/4"   | 1/4"-19   | 35,5     | 12,5 | 4,0  | 17 | DRF-1/4"-45°-DN 06   |
| 08       |    | 5/16"  | 1/4"-19   |          |      | 5,5  | 19 | DRF-1/4"-45°-DN 08   |
| 06       |    | 1/4"   | 3/8"-19   |          |      | 4,0  | 19 | DRF-3/8"-45°-DN 06   |
| 08       |    | 5/16"  | 3/8"-19   |          |      | 5,5  | 19 | DRF-3/8"-45°-DN 08   |
| 10       |    | 3/8"   | 3/8"-19   | 40,0     | 15,0 | 7,0  | 19 | DRF-3/8"-45°-DN 10   |
| 10       |    | 3/8"   | 1/2"-14   | 49,0     | 21,0 | 7,0  | 27 | DRF-1/2"-45°-DN 10   |
| 12       |    | 1/2"   | 1/2"-14   | 52,0     | 20,5 | 9,5  | 27 | DRF-1/2"-45°-DN 12   |
| 12       |    | 1/2"   | 5/8"-14   |          |      | 9,5  | 27 | DRF-5/8"-45°-DN 12   |
| 16       |    | 5/8"   | 5/8"-14   |          |      | 12,0 | 27 | DRF-5/8"-45°-DN 16   |
| 12       |    | 1/2"   | 3/4"-14   | 54,5     | 22,0 | 9,5  | 32 | DRF-3/4"-45°-DN 12   |
| 16       |    | 5/8"   | 3/4"-14   |          |      | 9,5  | 32 | DRF-3/4"-45°-DN 16   |
| 19       |    | 3/4"   | 3/4"-14   | 64,5     | 27,5 | 14,5 | 32 | DRF-3/4"-45°-DN 19   |
| 19       |    | 3/4"   | 1"-11     |          |      | 14,5 | 41 | DRF-1"-45°-DN 19     |
| 25       |    | 1"     | 1"-11     | 91,0     | 31,5 | 20,0 | 41 | DRF-1"-45°-DN 25     |
| 25       |    | 1"     | 1 1/4"-11 |          |      | 20,0 | 50 | DRF-1 1/4"-45°-DN 25 |
| 31       |    | 1 1/4" | 1 1/4"-11 | 97,0     | 34,0 | 25,0 | 50 | DRF-1 1/4"-45°-DN 31 |
| 31       |    | 1 1/4" | 1 1/2"-11 |          |      | 25,0 | 55 | DRF-1 1/2"-45°-DN 31 |
| 38       |    | 1 1/2" | 1 1/2"-11 | 115,0    | 47,0 | 31,0 | 55 | DRF-1 1/2"-45°-DN 38 |
| 51       |    | 2"     | 2"-11     | 142,0    | 59,0 | 40,0 | 70 | DRF-2"-45°-DN 51     |